


# Cromophtal® DPP Coral Red C

yellowish red pigment with medium hiding power and excellent resistance to weathering; recommended for high-grade decorative and industrial paints

**chemical type** diketo-pyrrolo-pyrrole

**Colour Index** Pigment Red 255 | 561050

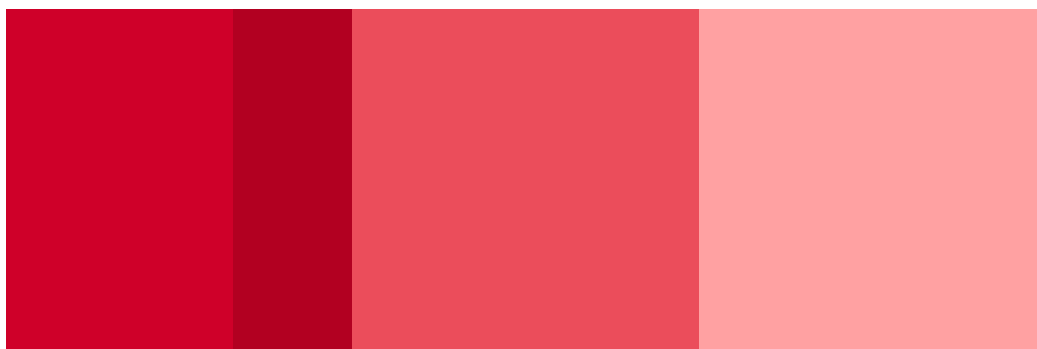

alkyd/melamine system full shade	alkyd/melamine system 1/3 standard depth of shade	alkyd/melamine system 1/25 standard depth of shade
-------------------------------------	--	---

## fastness to weathering

acrylic/melamine system	1/25 standard depth of shade	4
	1/3 standard depth of shade	4–5
	70:30 Irgalite® Red FBL	4–5
	70:30 Irgalite® Yellow GO	4
	full shade	4–5
alkyd/melamine system	1/25 standard depth of shade	5
	1/3 standard depth of shade	4–5
	70:30 Irgalite® Red FBL	4–5
	70:30 Irgalite® Yellow GO	4
	full shade	5
two-coat metallic system	1/25 standard depth of shade	5
	1/3 standard depth of shade	5
	full shade	5

## fastness to light

alkyd/melamine system	1/25 standard depth of shade	8
	1/3 standard depth of shade	8
	70:30 Irgalite® Red FBL	8
	70:30 Irgalite® Yellow GO	8
	full shade	8

## suitability for industries

automotive	general industrial	coil	powder	wood	decorative
○	●	⊙	○	●	●

## suitability for applications

baking finishes	water-based	acrylic/isocyanate	acid-curable	amine-curable	air-drying
-----------------	-------------	--------------------	--------------	---------------	------------

●                      ●                      ●                      ●                      ●                      ●					
explanation of symbols		● suitable	⊙ potentially suitable	○ not suitable	
<b>physical data</b>					
pH			density [g/cm <sup>3</sup> ]		1.40
conductivity [μS/cm]			bulk volume [l/kg]		4.6
specific surface [m <sup>2</sup> /g]	10		dry content [%]		
oil absorption [g/100 g]	59				
<b>thermal resistance</b>					
150 °C (302 °F), 30 min.			5		
200 °C (392 °F), 10 min.			5		
<b>fastness to overcoating</b>					
cellulose nitrate paint			5		
baking finish, 130 °C (266 °F), 30 min.			4		
<b>resistance to solvents</b>					
butyl acetate	4		water		5
ethanol	4		white spirit		5
methylethyl ketone	3		xylene		5
methoxy-1,2-propanol					

Please contact your BASF sales representative for more information on the test methods applied.

The proximity of the demonstrated shades to the original hues depends on the settings and calibration of the equipment used (monitor, printer).

#### Safety

When handling this product, please comply with the advice and information given in the safety data sheet and observe protective and workplace hygiene measures adequate for handling chemicals.

It cannot be ruled out that this product contains particles < 0.1 μm.

If document contains an electron microscopy photograph: Pigment particles form the particle size distribution shown in the electron microscopy photograph above only after intensive dispersion by high shear stresses. In the supplied bulk material, the high adhesive forces between the tiny primary pigment particles cause them to form much larger agglomerates and aggregates which determine the flow and dust properties.

#### Note

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights, etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our product to ensure that any proprietary rights and existing laws and legislation are observed.

® = registered trademark, ™ = trademark of the BASF Group, unless otherwise noted