

Polsperse™ 20

Polsperse 20 is an ultrafine kaolin produced by a high intensity pulverisation process. **Polsperse 20** is specifically designed for use in solvent-based paints. The major advantage of **Polsperse 20** is that it disperses rapidly in these paints to a fine Hegman Gauge value.


SPECIFICATION

		Polsperse 20
Dispersion	(μm max.)	25
Brightness	(ISO R457)	85.5 \pm 1.0
+ 300 mesh	(mass % max.)	0.02
+ 10 μm	(mass % max.)	0.5
- 2 μm	(mass %)	80 \pm 3
Moisture	(mass % max. as produced)	1.5

TYPICAL PROPERTIES

Yellowness		4.7
Specific gravity		2.6
pH		5.0
Surface area (BET; m^2/g)		14
Oil absorption ($\text{g}/100\text{g}$)		42
Aerated powder density (kg/m^3)		340
Tapped powder density (kg/m^3)		650
Water soluble salt content (mass %)		0.20
Chemical analysis by X-ray fluorescence		
SiO_2	(mass %)	47
Al_2O_3	(mass %)	38
CAS No.		1332-58-7

TYPICAL PARTICLE SIZE DISTRIBUTION GRAPH

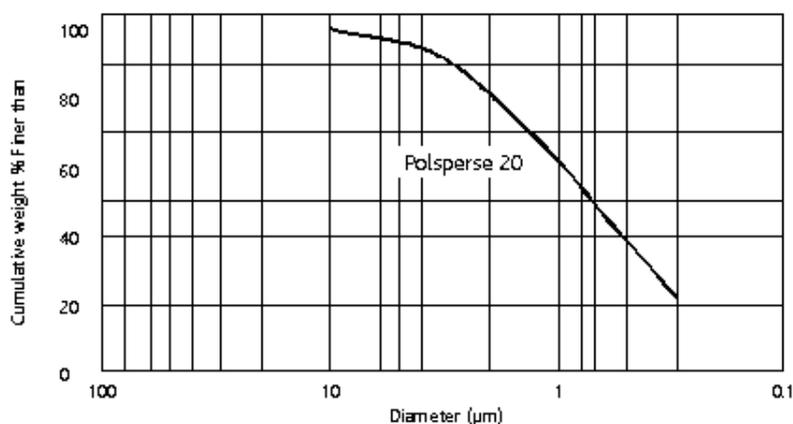

DAT003K

March 2008
©IMERY'S Minerals Ltd - 2008
Fifth Edition. This data sheet supersedes the data sheet dated February 2004

Polsperse™ is a trademark of IMERY'S Minerals Ltd



ISO 9001
FM 14752

Kaolin does not appear in EINECS as an individual entry but is classified as "naturally Occurring Substance" with the EINECS No. 310-127-6.

IMERY'S

Par Moor Centre,
Par Moor Road, Par
Cornwall, England
PL24 2SQ
Tel: +44 1726 81 8000
Fax: +44 1726 81 1200

IMERY'S is a business name of IMERY'S Minerals Ltd

The data quoted are determined by the use of IMERY'S Minerals Ltd Standard Test Methods, copies of which will be supplied on request. Every precaution is taken to ensure the products conform to our published data, but since the products are based on naturally occurring raw materials, we reserve the right to change these data should it become necessary. Sales are in accordance with our 'Conditions of Sale', copies of which will be supplied on request.